
Maehwa Glass Finishes

Transparent



Opal White Mix*

(blushed opal white / translucent mix)



Pale Pink Mix*

(blushed pale pink / translucent mix)



Smokey Grey Mix*

(blushed smokey grey / translucent mix)



* For exact mix quantities please refer to each Maehwa composition or module

For a custom mix please contact the studio

Maehwa Chandelier Flow 26

MECHF26

CE IP20

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Power Input

110-120V 50-60Hz

Standard Light Source

26 Proprietary Maehwa LEDs. 21.6 W, 3170 lm

Light Source Properties

2700K warm white. CRI>95. Energy label A.

Standard white canopy L350 (14" x 4.5" x 5) included.

Standard built-in phasecut dimmable driver included.

Further driver options below.

Standard Steel Wire Suspension:

157.5" steel wires and flex cable

Drop height range including canopy: 30.7"-165.4"

Flex Cable Suspension Options on request:

10m steel wires and flex cables
Drop height range with flex cable options including canopy: 30.7"-401.6"

MECHF26

Lamp Dimensions

W60.1" x D22.8" x H18.1"


Weight

~20 lbs.

Modules:

1 x MEPEH09

1 x MEPEH17Y

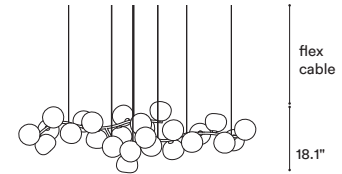

Glass

Brass Finish

Transparent

Brushed Brass
Brushed Nickel

MECHF26-U1-BRTR
MECHF26-U1-NKTR

Opal White Mix
(14 blushed + 12 translucent)

Brushed Brass
Brushed Nickel

MECHF26-U1-BROW
MECHF26-U1-NKOW

Pale Pink Mix
(14 blushed + 12 translucent)

Brushed Brass
Brushed Nickel

MECHF26-U1-BRPP
MECHF26-U1-NKPP

Smokey Grey Mix
(14 blushed + 12 translucent)


Brushed Brass
Brushed Nickel

MECHF26-U1-BRSG
MECHF26-U1-NKSG



MECHF26 Options

MECHF26



Canopy L350
CA350-MECHF-U1

Driver (included)

Canopy Dimension
14" x 4.5" x 2"

Remote

Phase Cut
Switch
1-10 Volt
DALI



MP350-MECHF-U1-PR
MP350-MECHF-U1-SR
MP350-MECHF-U1-VR
MP350-MECHF-U1-DR

Built-in

Phase Cut
Switch
1-10 Volt
DALI



MP350-MECHF-U1-PB
MP350-MECHF-U1-SB
MP350-MECHF-U1-VB
MP350-MECHF-U1-DB

Std.

Maehwa Chandelier Flow 34

MECHF34

CE IP20 ⊕

Materials

Transparent, translucent or brushed handblown borosilicate glass, handmade finish electroplated brass.

Power Input

110-120V 50-60Hz

Standard Light Source

34 Proprietary Maehwa LEDs. 28.2 W, 4150 lm

Light Source Properties

2700K warm white. CRI>95. Energy label A.

Standard white canopy L650 (25.5" x 4.5" x 2") included.

Standard built-in phasecut dimmable driver included.

Further driver options below.

Standard Steel Wire Suspension:

157.5" steel wires and flex cable

Drop height range including canopy: 22"-169.3"

Flex Cable Suspension Options on request:

10m steel wires and flex cables

Drop height range with flex cable options including canopy: 22"-405.5"

MECHF34

Lamp Dimensions


W68.2" x D26" x H19.8"

Weight

~26 lbs.

Modules:

2 x MEPEH17Y

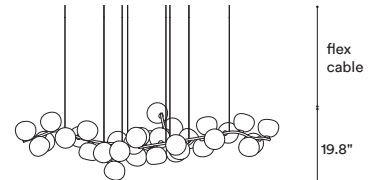

68.2"

flex cable

19.8"

Glass

Brass Finish

Transparent

Brushed Brass
Brushed Nickel

MECHF34-U1-BRTR
MECHF34-U1-NKTR

Opal White Mix
(18 blushed + 16 translucent)

Brushed Brass
Brushed Nickel

MECHF34-U1-BROW
MECHF34-U1-NKOW

Pale Pink Mix
(18 blushed + 16 translucent)

Brushed Brass
Brushed Nickel

MECHF34-U1-BRPP
MECHF34-U1-NKPP

Smokey Grey Mix
(18 blushed + 16 translucent)

Brushed Brass
Brushed Nickel


MECHF34-U1-BRSG
MECHF34-U1-NKSG



26"

MECHF34 Options

MECHF34



Canopy L650

CA650-MECHF-U1

Driver (included)

Canopy Dimension

25.5" x 4.5" x 2"

Remote

Phase Cut
Switch
1-10 Volt
DALI



MP650-MECHF-U1-PR
MP650-MECHF-U1-SR
MP650-MECHF-U1-VR
MP650-MECHF-U1-DR

Built-in

Phase Cut
Switch
1-10 Volt
DALI



MP650-MECHF-U1-PB
MP650-MECHF-U1-SB
MP650-MECHF-U1-VB
MP650-MECHF-U1-DB

Std.